




Breaker

# TOP205J

18-26ton

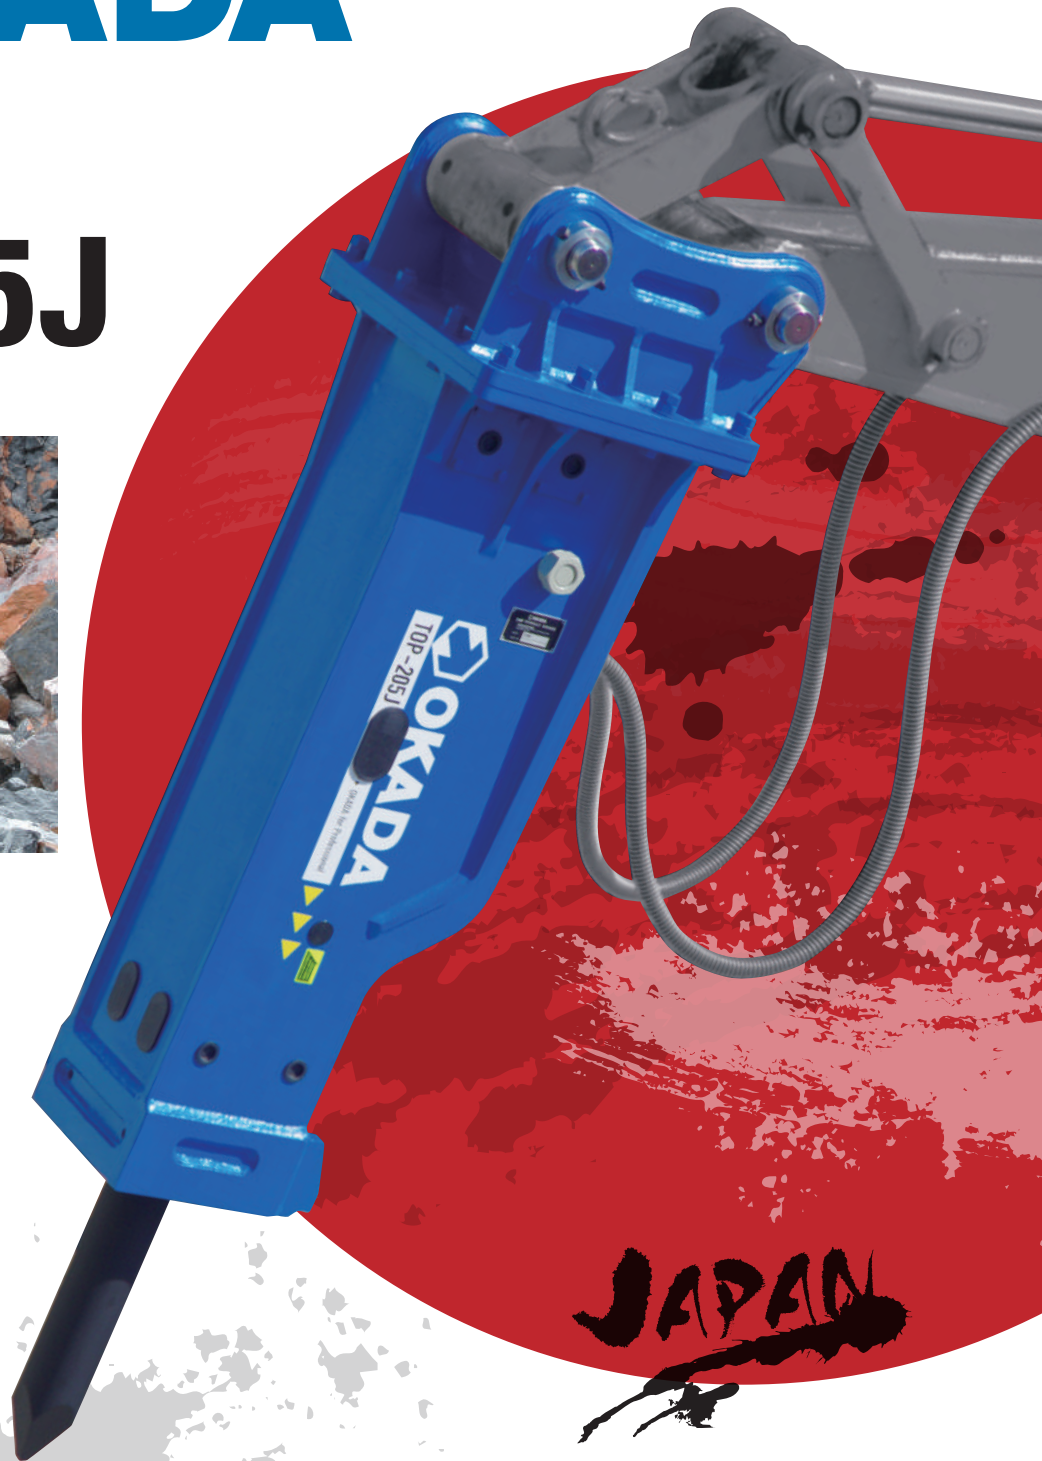

**JAPAN**

# POWER

shows the best performance  
at various sites of quarry, mining,  
general construction, demolition and more.

# Exhaustive Quality Control



Access to blow speed adjuster.

Dual greasing points.

Thicker bottom plate

2 Lifting eyes for loading or unloading the breaker from truck.

Auto-lubrication system (option)

Inspection window for retightening the back nuts.

Anti wear steel

No opening on the bracket, every part is plugged.

1. Anti-Blank Fire system
2. Anti-abrasion box style bracket design
3. Blow speed control adjuster
4. High pressure accumulator
5. Auto-lubrication system (option)



## SPECIFICATIONS

	Unit	TOP205J
Working Pressure	MPa	15~18
Oil flow Consumption	L/min	110~135
Frequency	b.p.m.	L 360~430
		H 500~560
Operating Weight	kg	1780
Overall Length	mm	2726
Working Steel Dia.	mm	135
Carrier Machine Weight Range	ton	18~26
Carrier Output Flow Range	L/min	140~210

The specifications of breaker are subject to change without notice. These numbers may be varied depending on the carrier machine condition and material.

## OKADA AIYON CORPORATION

[www.okada-aiyon.com](http://www.okada-aiyon.com)

4-1-18, Kaigan-dori, Minato-ku, Osaka 552-0022, Japan

Tel +81-(0)6-6576-1268 Fax +81-(0)6-6576-1516

Email [sales@aiyon.co.jp](mailto:sales@aiyon.co.jp)

[facebook.com/okadaaiyon](https://www.facebook.com/okadaaiyon)

[youtube.com/OkadaAiyonCorp](https://www.youtube.com/OkadaAiyonCorp)

